GARLAND®

Item #:_____
Models: All G24 Series
Product Name: Heavy-Duty Gas Griddles

*Model G24-24GTHX*
*(shown mounted on optional CS24-24 stand/casters)*

## Specification:

Heavy duty gas griddles available in five (5) widths; 24", 36", 48", 60", and 72". High performance, high volume production with even, consistent, controlled temperatures 100° to 450° F (40°-230°C) range. 3/4" (19mm) thick griddle plate, with 24" (610 mm) deep grilling surface.

Garland has designed this heavy-duty griddle to give the features required for high-volume operations. Griddles are available with hi-lo valve controls or for temperature set control models with snap action thermostats. G24 griddles with snap action thermostats do not require any electrical connections. Valve or thermostat models have a control and burner for every 12" (305mm) width of griddle for maximum heat input on the plate surface.

## Griddle Features:

- Stainless steel front - the balance, black power coat epoxy
- Full spatula width front grease trough
- Large grease bucket holds 1-3/4 gallons (7.9 liters)
- 3/4" (19mm) polished steel griddle plate with 2-5/8" (67mm) welded splash guards on both sides and rear
- 24" (610mm) deep grilling surface
- Available with snap action thermostats or hi-lo valves
- Chrome plated thermostat guards
- 33,333 BTU (valve controlled) or 30,000 BTU (thermostat controlled) for every 12" (305mm) of griddle width
- 100° to 450° F (40°-230°C) temperature range
- 5 griddle widths available - 24" (610mm) through 72" (1829mm)
- 4" (102mm) stainless steel legs

## Optional Features:

- ❑ Stainless steel sides
- ❑ Stainless steel back
- ❑ Grooved griddle plate (in 12" sections)
- ❑ For models that are "CE" approved with valve controlled flame failure features add the suffix "GSFD" at the end of the model number

## Optional CS24 Series Stands:

Floor Stands: Heavy-duty stands of open design with seamless welded square tube legs. Black finish storage shelf supplied with stands up to 48" (1219mm) wide. Working height of all units on stands 35-1/2" (902mm). Stand widths available in 15" (381mm), 24" (610mm), 30" (762mm), 36" (914mm), 48" (1219 mm), 60" (1524mm) and 72" (1829mm). Example for G24-36G griddle, specify compatible CS24-36 stand. For stainless steel finish, add SS suffix to model number

Optional:

- ❑ Swivel caster; set of 4

**Garland Commercial Industries, Inc.**
185 East South Street
Freeland, Pennsylvania 18224
Phone: (570) 636-1000
Fax: (570) 636-3903

**Garland Commercial Ranges Ltd**
1177 Kamato Road, Mississauga, Ontario
L4W 1X4 CANADA
Phone: 905-624-0260
Fax: 905-624-5669

**Enodis UK LTD**
Swallowfield Way, Hayes, Middlesex
UB3 1DQ ENGLAND
Telephone: 081-561-0433
Fax: 081-848-0041

GARLAND®

Item #:_____
Models: All G24 Series
Product Name: Heavy-Duty Gas Griddles

| Input Chart Natural Gas | | | | |
|---|---|---|---|---|
| **Model** | **Description** | **Controls** | **BTU/HR** | **kW/HR** |
| G24-24G<br>G24-24GTHX | 24” (610mm)<br>Griddle | 2 Hi-lo Valves<br>2 Thermostats | 66,500<br>60,000 | 19.48<br>17.58 |
| G24-36G<br>G24-36GTHX | 36” (914mm)<br>Griddle | 3 Hi-lo Valves<br>3 Thermostats | 100,000<br>90,000 | 29.31<br>26.38 |
| G24-48G<br>G24-48GTHX | 48” (1219mm)<br>Griddle | 4 Hi-lo Valves<br>4 Thermostats | 133,000<br>120,000 | 38.98<br>35.17 |
| G24-60G<br>G24-60GTHX | 60” (1524mm)<br>Griddle | 5 Hi-lo Valves<br>5 Thermostats | 166,500<br>150,000 | 48.78<br>43.96 |
| G24-72G<br>G24-72GTHX | 72” (1829mm)<br>Griddle | 6 Hi-lo Valves<br>6 Thermostats | 200,000<br>180,000 | 58.61<br>52.75 |

## Installation Notes

| **Manifold Operating Pressure** | | **Combustible Wall Clearances: In (mm)** | | | Ratings shown are for natural gas installations up to 2000 feet (610m) above sea level. BTU input ratings must be de-rated for high altitude installations. Specify altitude of product if over 2000 feet (610m) |
|---|---|---|---|---|---|
| | | Sides | Back | Base | |
| Natural Gas | Propane | 6(152) | 6(152) | Non-combustible | |
| 4” WC (10 mbar) | 10” WC (24 mbar) | **NOTE:** Installation clearance reductions are applicable only where local codes permit | | | |
| Note: For use with Natural & L.P Gas only | | | | | |

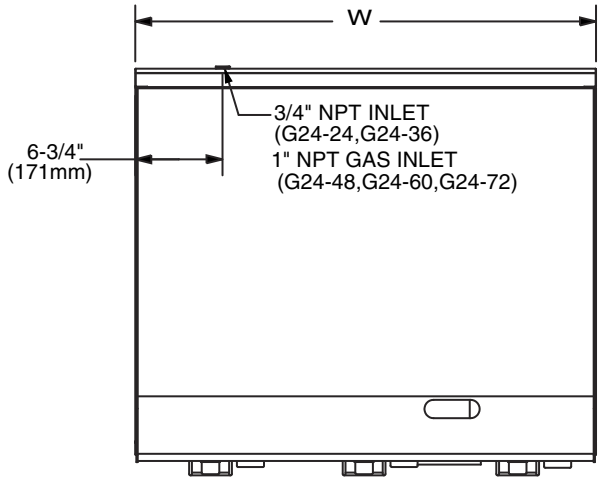


| Model | W |
|---|---|
| G24-24G<br>G24-24GTHX | 24” (610mm) |
| G24-36G<br>G24-36GTHX | 36” (914mm) |
| G24-48G<br>G24-48GTHX | 48” (1219mm) |
| G24-60G<br>G24-60GTHX | 60” (1524mm) |
| G24-72G<br>G24-72GTHX | 72” (1829mm) |

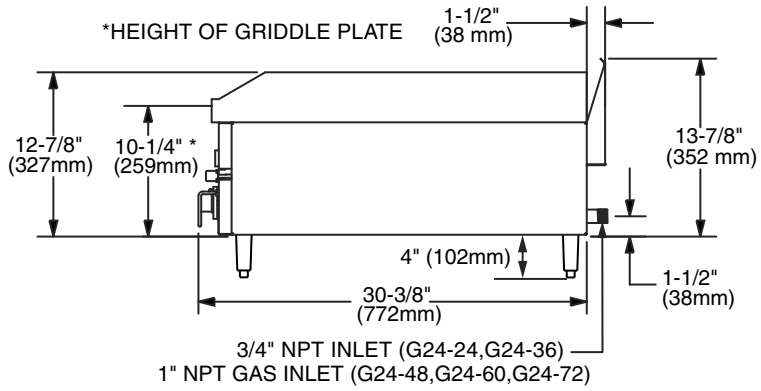


Continuous product improvement is a Garland policy. Specifications and design are subject to change without notice.